


PIPE SUSPENSION GRAB



RSV 3/200 D

The Original For Your Safety . . .

Only an original WIMAG pipe suspension grab can provide all advantages:

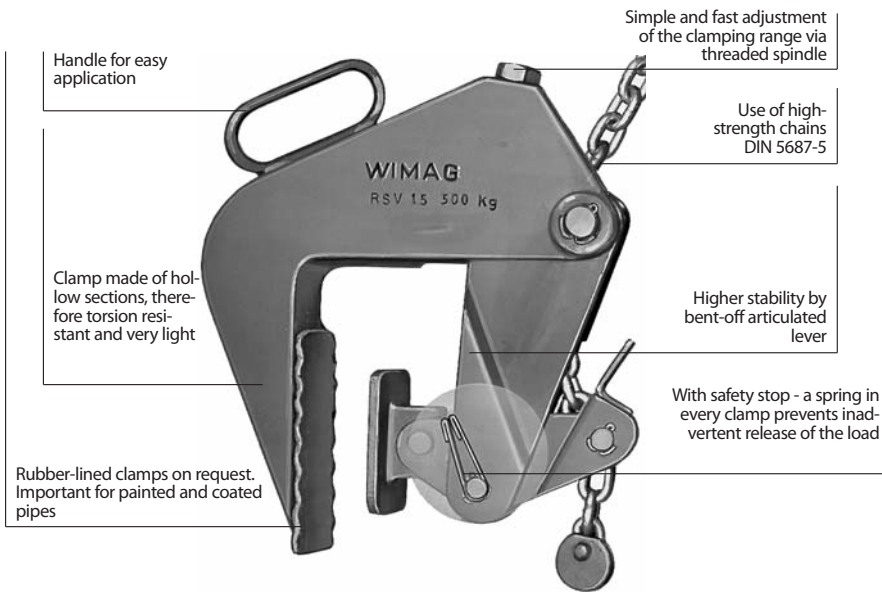


Problem:

The handling of prefabricated manholes according to **DIN 4034 Part 1** with socket end for axial seal.

Solution:

The WIMAG pipe suspension grab RSV ... D offering the following advantages:

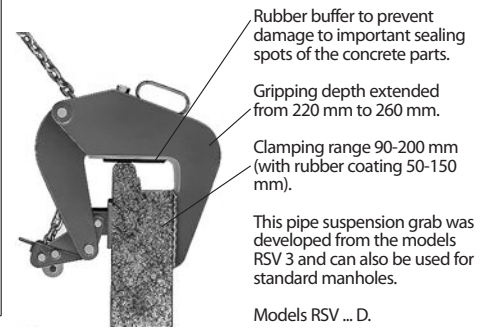

A rubber-coated pipe suspension grab is needed for smooth, painted or coated manholes!

| Order No. | Model | Carrying Capacity kg | Number Of Clamps | Contact Surface Of Clamps | Clamping Range mm | Manhole Inside Diameter m | Chain Length m | Weight Approx. kg |
|-----------|-------|----------------------|------------------|---------------------------|-------------------|---------------------------|----------------|-------------------|
|-----------|-------|----------------------|------------------|---------------------------|-------------------|---------------------------|----------------|-------------------|

Pipe suspension grabs for manholes according to DIN 4034 Part 2

| | | | | | | | | |
|---------|------------|-------|---|----------------|----------|-----------|------|----|
| 110 010 | RSV 1,5 | 1.500 | 3 | steel/serrated | 40 - 120 | 0,4 - 2,0 | 1,50 | 31 |
| 110 011 | RSVL 1,5 | 1.500 | 3 | steel/serrated | 40 - 120 | 0,4 - 3,0 | 2,00 | 33 |
| 110 020 | RSVG 1,5 | 1.500 | 3 | rubber-coated | 0 - 70 | 0,4 - 2,0 | 1,50 | 34 |
| 110 510 | RSV 3 | 3.000 | 3 | steel/serrated | 50 - 180 | 0,4 - 2,0 | 1,60 | 55 |
| 110 511 | RSVL 3 | 3.000 | 3 | steel/serrated | 50 - 180 | 0,4 - 3,0 | 2,20 | 58 |
| 110 520 | RSVG 3 | 3.000 | 3 | rubber-coated | 0 - 130 | 0,4 - 2,0 | 1,60 | 55 |
| 110 530 | RSV 3/230 | 3.000 | 3 | steel/serrated | 90 - 230 | 0,4 - 2,0 | 1,60 | 54 |
| 110 531 | RSVL 3/230 | 3.000 | 3 | steel/serrated | 90 - 230 | 0,4 - 3,0 | 2,20 | 58 |
| 110 540 | RSVG 3/180 | 3.000 | 3 | rubber-coated | 50 - 180 | 0,4 - 2,0 | 1,60 | 56 |
| 110 110 | RSVE 0,5 | 500 | 1 | steel/serrated | 40 - 120 | - | 0,80 | 10 |
| 110 610 | RSVE 1 | 1.000 | 1 | steel/serrated | 50 - 180 | - | 0,80 | 17 |
| 110 210 | RSV 1 | 1.000 | 2 | steel/serrated | 40 -120 | 0,4 - 2,0 | 1,50 | 21 |
| 110 710 | RSV 2 | 2.000 | 2 | steel/serrated | 50 - 180 | 0,4 - 2,0 | 1,60 | 33 |
| 110 850 | RSVTL 4 | 4.000 | 4 | steel/serrated | 50 - 180 | 1,0 - 3,0 | 2,20 | 85 |

Pipe suspension grabs for manholes according to DIN 4034 Part 1 and 2

| | | | | | | | | |
|---------|--------------|-------|---|----------------|----------|-----------|------|----|
| 110 515 | RSV 3/200 D | 3.000 | 3 | steel/serrated | 90 - 200 | 0,4 - 2,0 | 1,60 | 69 |
| 110 516 | RSVL 3/200 D | 3.000 | 3 | steel/serrated | 90 - 200 | 0,4 - 3,0 | 2,20 | 73 |