	<b>DIMENSIONS (Cm)</b>	<b>Effective</b> 117 x 65 x h.87
		<b>On Pallet</b> 123 x 75 x h.100
	<b>WEIGHT (Kg)</b>	<b>Effective</b> 630
		<b>On Pallet</b> 645
	<b>OIL</b>	With viscosity = 680 Quantity = 3 lt.
	<b>ELECTRIC MOTOR</b>	400V - 50HZ 5,5 HP - 4 kW
<b>RPM</b>	37	


Cutting capability	R. = 65 Kg. / mm <sup>2</sup>			R. = 85 Kg. / mm <sup>2</sup>		
	1 Ø 46	2 Ø 32	3 Ø 24	1 Ø 40	2 Ø 30	3 Ø 22

**TECHNICAL FEATURES**


- Completely new projected machine body in monoblock made of spheroidal cast iron;
- Gearing in cemented steel;
- Reinforced mechanical parts for a better resistance and performance;
- Higher Cutting capability;
- Special Screw Locator to align perfectly one or more rod between the blades.

**OPTIONAL**

**BASE AND PEDAL**  
This system is recommended when a working bench is used to lay the bars, allowing the operator to work maintaining a correct posture and minimizing the effort.



**STANDARD EQUIPMENT**

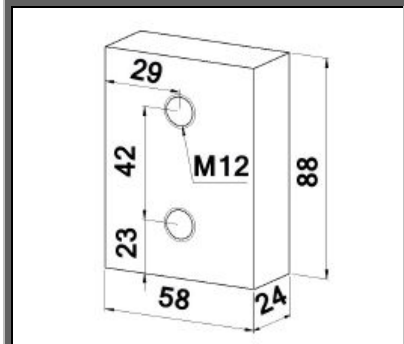

**BLADES**  
On each cutting machine, 2 hardened steel blades are already fitted.

**SCREW LOCATOR**  
Allows perfect alignment of one rod or more between the blades and the achievement of perfectly perpendicular cuts.

**LUBRIFICATION SYSTEM**  
Thanks to the new construction system, the parts that require it are easily reached by a single point of grazing.