


## P38 EVO 3-PHASE

	<b>DIMENSIONS (Cm)</b>	<b>Effective</b> 86 x 90 x h.85
		<b>On Pallet</b> 105 x 90 x h.91
	<b>WEIGHT (Kg)</b>	<b>Effective</b> 365
		<b>On Pallet</b> 375
	<b>OIL</b>	SAE = 40 Quantity = 8 lt.
	<b>ELECTRIC MOTOR</b>	400V - 50HZ 4 HP - 3 kW
<b>RPM</b>	9	

Bending capability	R. = 65 Kg. / mm <sup>2</sup>			R. = 85 Kg. / mm <sup>2</sup>		
	1 Ø 34	2 Ø 26	3 Ø 20	1 Ø 32	2 Ø 24	3 Ø 18

### STANDARD EQUIPMENT

#### **BIGGER ROTATING PLATE: DIMENSION Ø 395 mm:**

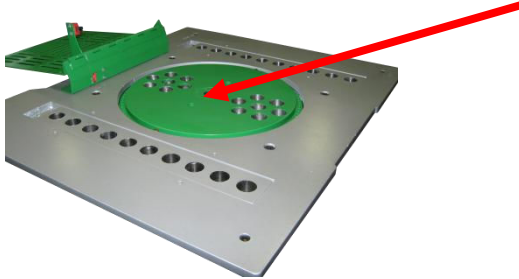

It can support bushes up to Ø 220 mm to realize bending of big radius without need of extra equipments (Special Arm for large radii).



1 hardened square pin; 1 hardened stirrup bending pin;  
3 hardened bush holding pins; 1 checking block; 1 pedal;  
6 bushes Ø50-60-70-80-95-120mm; 1 set Allen keys .  
**2 Long Saddles, indispensable to realize the "double bend"!**

### OPTIONALS



**"UNIQUE 2 in 1"**  
To bend more stirrups simultaneously and determine the length from the bending point.



**Spirals/Hoops Device:**  
Allows to realize spiral/hoop armatures with bars Ø max.16 mm.



**"Basic Angle Control" Panel:**  
Allows to set up manually 6 bending angles, that will be carried out in sequence.



**"Angle Control" Panel:**  
This special computer permits to program up to 20 bending angles in very rapid and intuitive way.



**2-Speed Motor:**  
Available on request for those who work bars of different diameters and want to optimize production times.



**Special Bushes for large radii.**



**Working top "Type B":** The cover in sheet metal prevents the turning plate from dust and material residuals.



#### **Roller Bench:**

To deposit and move the material. Available in different lengths, as needed.