
	<b>DIMENSIONS (Cm)</b>	<b>Effective</b> 160 x 116 x h.96
		<b>On Pallet</b> 160 x 116 x h.111
	<b>WEIGHT (Kg)</b>	<b>Effective</b> 1600
		<b>On Pallet</b> 1650
	<b>OIL</b>	SAE = 40 Quantity = 25 lt.
<b>ELECTRIC MOTOR</b>	400V - 50HZ 10 HP - 7,5 kW	
<b>RPM</b>	5	

Bending capability	R. = 65 Kg. / mm <sup>2</sup>			R. = 85 Kg. / mm <sup>2</sup>		
	1 Ø 60	2 Ø 42	3 Ø 34	1 Ø 50	2 Ø 36	3 Ø 30

### STANDARD EQUIPMENT

**BIGGER ROTATING PLATE: DIMENSION Ø720 mm**

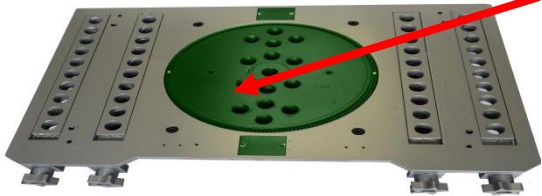

It can support bushes up to Ø 400 mm to realize bending of big radius without need of extra equipments (Special Arm for large radii).

**04 Long Saddles, indispensable to realize the "double bend"!**



1 Pedal for electric control; 1 Hardened stirrup bending; 1 Hardened square pin; 5 Hardened bush holding pins; 1 Checking block; 7 bushes Ø 80 - 95 - 110 - 150 - 200 - 240 - 300 mm; 1 set Allen keys.

### OPTIONALS



**"Basic Angle Control" Panel:**

Allows to set up manually 6 bending angles, that will be carried out in sequence.



**"Angle Control" Panel:**

This special computer permits to program up to 20 bending angles in very rapid and intuitive way.



**Roller Bench:**

To deposit and move the material. Available in different lengths, as needed.



**Special Bushes for large radii.**