



BLINDAGE ALU

Série 250


Planche étançonnement

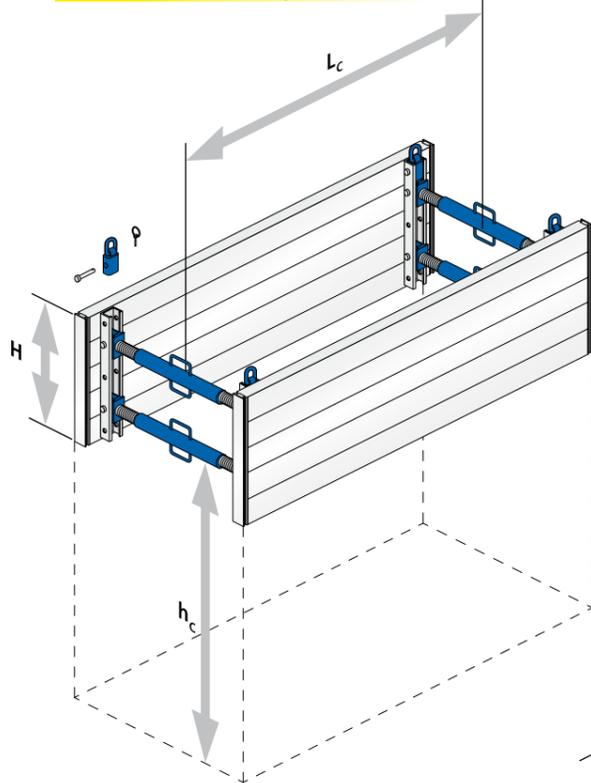

Caisson

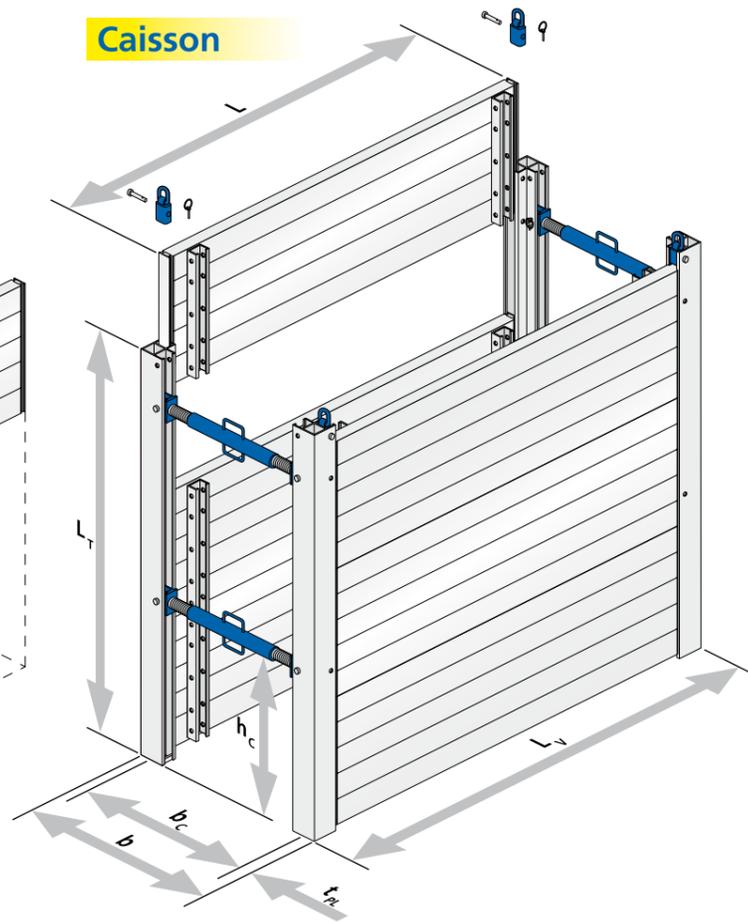

Puits

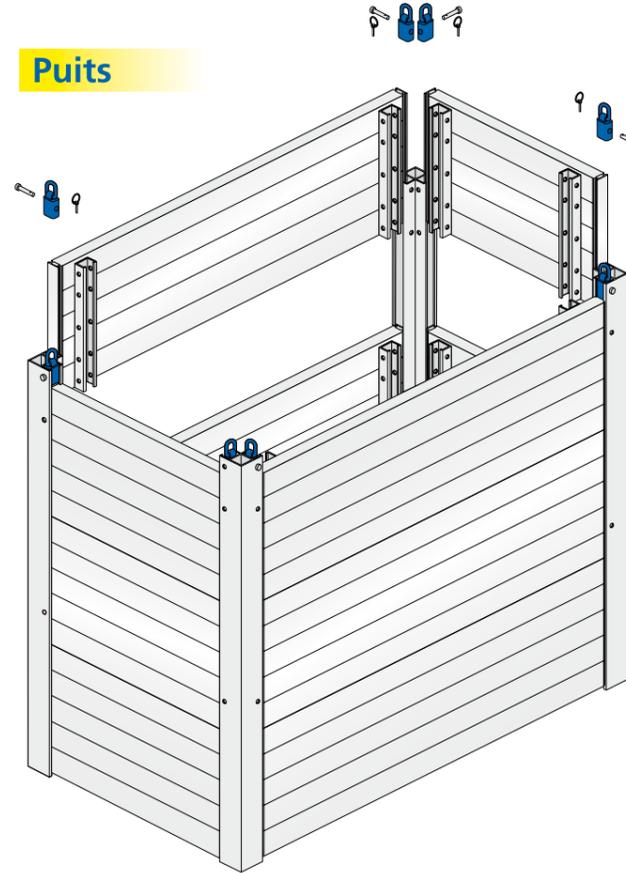


Panneaux $t_{pl} = 60\text{mm}$

Longueur panneau L [m]	Longueur système L _v [m]	Hauteur blindage H [m]	Passage libre de la longueur des tuyaux L _c [m]	Hauteur libre de passage des tuyaux h _c [m]	Pression du sol autorisée [kN/m ²]	Poids étau B inclus [kg/caisson]	Poids [kg/puits]
1,50	1,50	0,60	1,18	1,32	32,6	95	130
	1,72	1,20	1,58	0,71		185	250
		1,80				250	370
2,00	2,00	2,40	1,68	1,32	26,5	320	485
		1,20				215	305
	1,80	295	450				
2,50	2,22	2,40	2,08	0,71	21,6	380	600
		0,60				120	185
	1,20	240	360				
3,00	2,72	1,80	2,58	0,71	17,5	340	535
		2,40				435	710
	3,00	1,20	135	215			
3,22	1,80	3,08	0,71	17,5	270	420	
					380	620	
	490	825					

Poteau

Longueur poteau L _r [m]	Poids [kg]
0,70	5,4
1,30	10,0
1,90	14,6
2,50	19,2

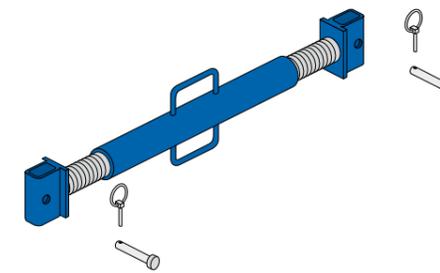

Etau

Type d'étau	Largeur de travail b _c [m]		Largeur de tranchée b [m]		Force admissible [kN]	Poids [kg]
	min.	max.	min.	max.		
A	0,63	0,85	0,78	1,00	109	7,3
B	0,85	1,31	1,00	1,46	92	9,4
C	1,32	2,23	1,47	2,38	62	13,6

