ZOONLION ARTICULATING BOOM LIFT ZA14J

Comply with CE/ANSI/CSA Standard

HIGHLIGHTS



Standard Features

\setminus	Horn
	All motion alarm
	Proportional control
	Self-closing entry gate
	Flashing beacon
	Auto-leveling system
	Emergency stop button
	Over tilt protection system
	Emergency descent system
	On-board diagnostic system
	Oscillating axle
	4.3' LED display
	Load sensing system
	Swing-out engine tray
< '	

Accessories & Options

- ▶ Platform work lights
- ► Anti-collision device
- ▶ AC power to platform




ACCESS WITH ZOOMLION GREEN


Phone: 0086(731)-88353692 E-mail: awp@zoomlion.com Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China Web: www.zoomlion-access.com

ZOOMLION

Model	ZA14J		
	Imperial	Metric	
	Size		
Work Height	51ft 10in	15.80m	
Platform Height	45ft 3in	13.80m	
Horizontal Outreach	27ft 3in	8.30m	
Up and Over Height	24ft 9in	7.55m	
A - Stowed Length	21ft 7in	6.57m	
B - Stowed Width	7ft 7in	2.30m	
C - Stowed Height	7ft 5in	2.27m	
D - Platform Length	6ft	1.83m	
E - Platform Width	2ft 6in	0.76m	
Jib Length	4ft 1in	1.24m	
F - Wheelbase	7ft 9in	2.36m	
G - Ground Clearance	1ft 5in	0.42m	
Performance			
Platform Capacity	660 lb	300kg	
Drive Speed	4.23 mph	6.8km/h	
Gradeability	45%(24°)	45%(24°)	
Axles Oscillation	4in	0.1m	
Turning Radius (Inside)	6ft 9in	2.06m	
Turning Radius (Outside)	15ft 8in	4.78m	
Swing	355° non-continuous		
Platform Rotation	±90°		
H-Tail Swing	0		
Max. Wind Speed	28mph	12.5m/s	
Power			
Diesel Engine	Kubota V2403 36kw/2600rpm Kubota V2403 36.8kw/2700rpm(EU V)		
Fuel Tank Capacity	17.2 (us gal)	65L	
Auxiliary Power	12	2V	
Control Voltage 12V		2V	
Hydraulic System Capacity	39.6 (us gal)	150L	
Hydraulic Tank Capacity	20.1 (us gal)	76L	
Drive	4WD		
Tire			
Туре	315/55 D20 Foam-filled Tires 33×12-20 Solid Tires		
Weight			
Gross	15653 lb	7100kg	





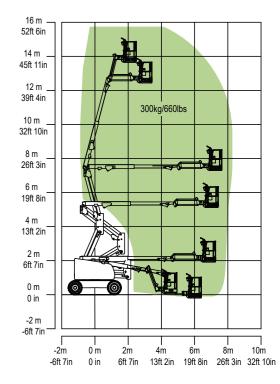

Range of Motion ZA14J