
ZOOMLION

ELECTRIC ARTICULATING BOOM LIFT

ZA26JE

Comply with CE/ANSI/CSA Standard

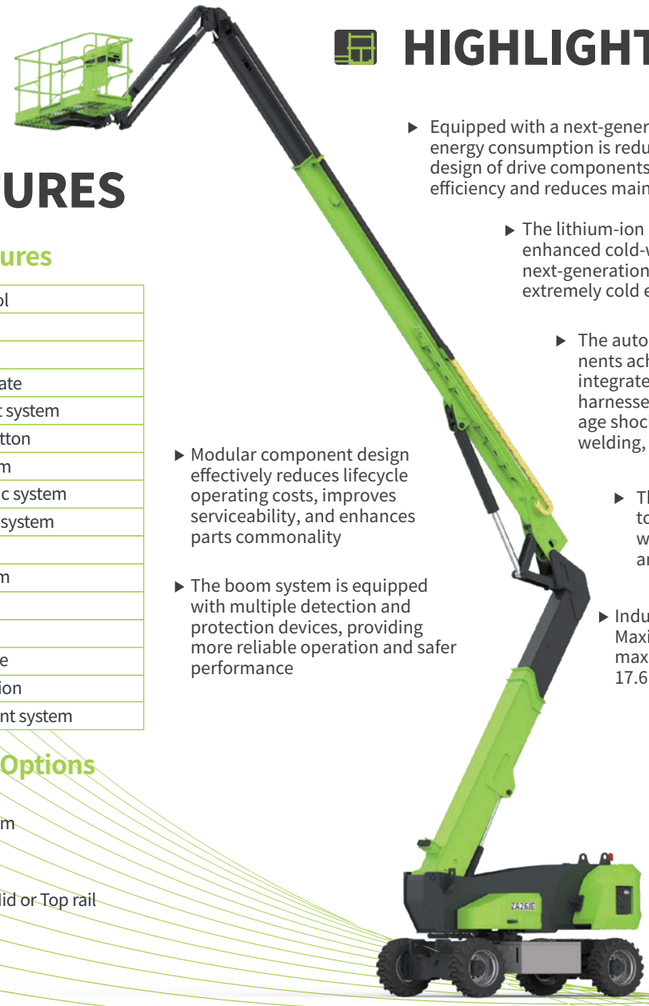

FEATURES

Standard Features

Proportional control
All motion alarm
Flashing beacon
Self-closing entry gate
Emergency descent system
Emergency stop button
Auto-leveling system
On-board diagnostic system
Over tilt protection system
Oscillating axle
Load sensing system
4.3' LED display
Horn
Anti-crushing device
Fast lowering function
Battery management system

Accessories & Options

- Platform light
- AC power to platform
- Non-marking tire
- GPS
- Platform mesh to Mid or Top rail
- Storage Tray
- White Noise Alarm

HIGHLIGHTS


- Equipped with a next-generation distributed power system, energy consumption is reduced by more than 30%. The modular design of drive components significantly improves maintenance efficiency and reduces maintenance costs
- The lithium-ion battery power system features enhanced cold-weather applicability. Equipped with a next-generation BMS, it is capable of operating in extremely cold environments as low as -30°C
- The automotive-grade electric drive components achieve IP67 protection rating. The integrated and modular design reduces wiring harnesses by 20%, lowers the risk of high-voltage shock, eliminates the risk of relay contact welding, and greatly improves reliability
- Modular component design effectively reduces lifecycle operating costs, improves serviceability, and enhances parts commonality
- The dual load design allows the machine to carry heavier payloads and larger workpieces, reducing lifting, handling, and turnaround time
- The boom system is equipped with multiple detection and protection devices, providing more reliable operation and safer performance
- Industry-leading working range in its class. Maximum working height reaches 28.2 m, maximum horizontal reach reaches 19.4 m / 17.6 m, and up-and-over height reaches 9.48 m


ACCESS WITH ZOOMLION GREEN

Phone: 0086(731)-88353692
E-mail: awp@zoomlion.com
Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China
Web: www.zoomlion-access.com

ZOOMLION

Model	ZA26JE
	Metric
Size	
Max Work Height	28.2m
Max Platform Height	26.2m
Max Horizontal Outreach	19.4m/17.6m
Max Up and Over Height	9.48m
A - Stowed Length	11.91m
B - Stowed Width	2.465m
C - Stowed Height	2.835m
D - Platform Length	2.44m
E - Platform Width	0.91m
F - Wheelbase	3.05m
G - Min Ground Clearance	0.40m
Rated load	250kg/360kg
Max Drive Speed	5km/h
Max Gradeability	45%(24°)
Axles Oscillation	0.2m
Turning Radius (Inside)	3.025m
Turning Radius (Outside)	6.311m
Turntable Swing	360° continuous
Platform Rotation	±90°
H-Tail Swing	1.428m
Max. Working Slope	5°
Max. Wind Speed	12.5m/s
Battery specification	80V/460Ah
Tire model	15-625 Foam-filled tires
Overall weight	18900kg

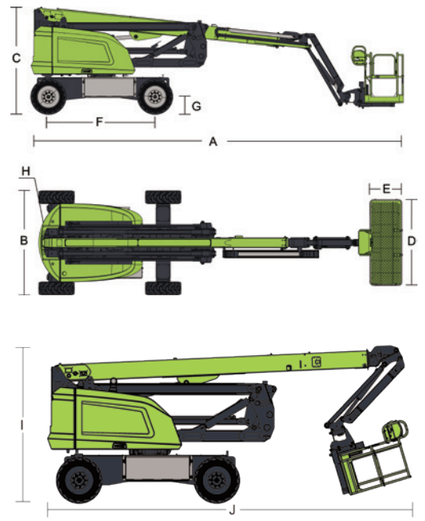

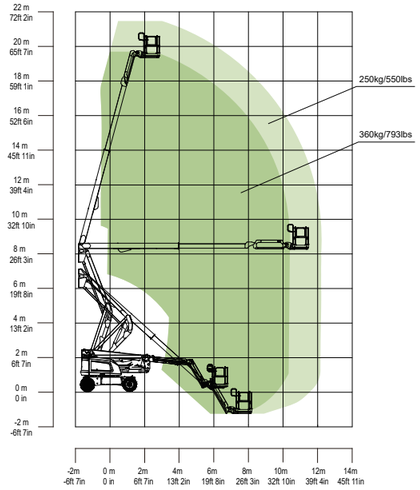

Range of Motion ZA26JE

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification.
Product specifications are updated to May, 2026.